


DUKKVALITET JP703FR

Åtta färger att välja emellan

CANVAS QUALITY JP703FR

Eight colours to choose

Flam skyddad	-	Flame retardancy
Stark	-	Strong
Färg	-	Colour
Kvalitet	-	Quality
Tålig	-	Enduring
Långlivad	-	Long life

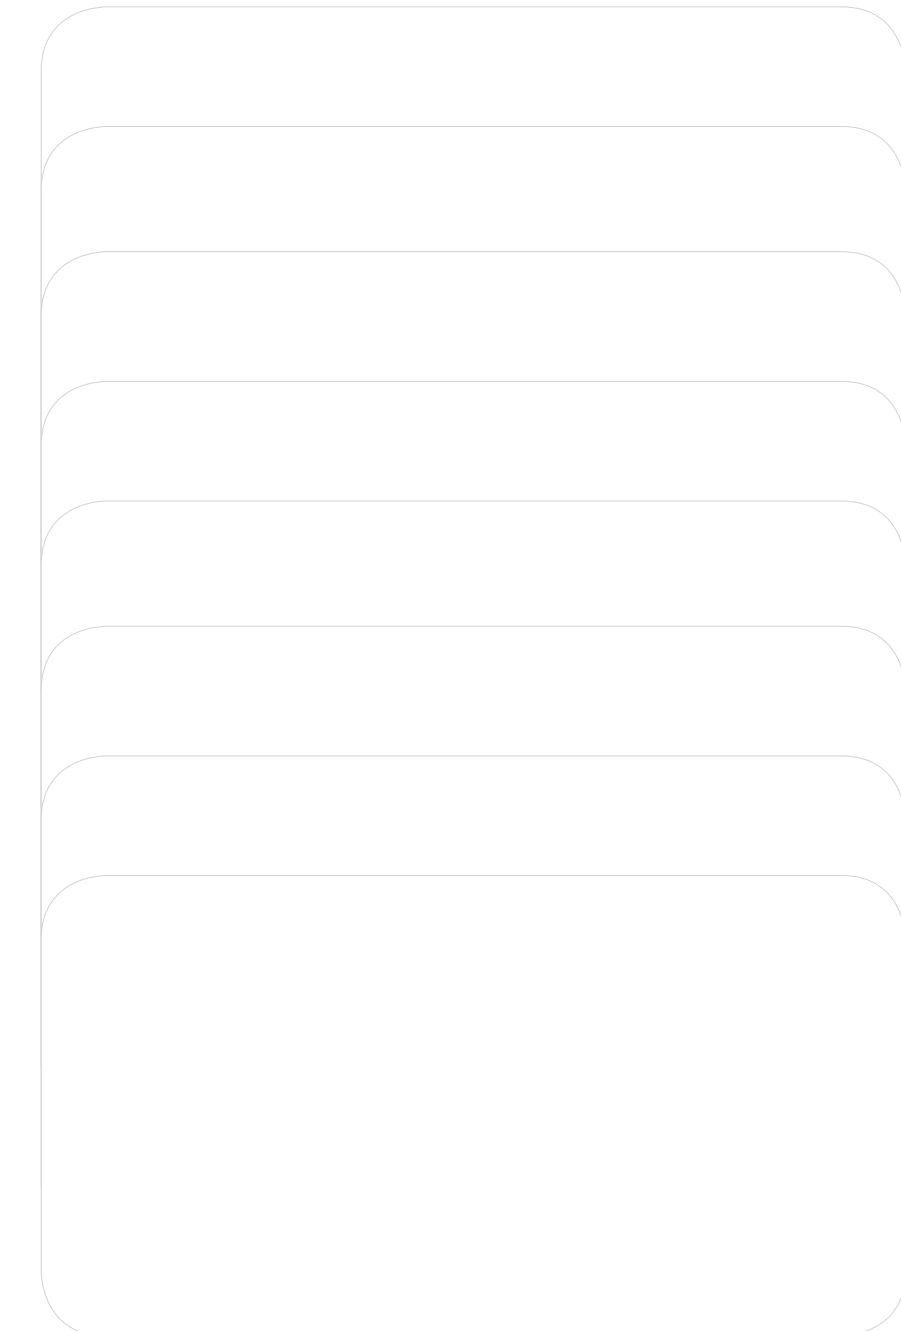

Specifikation JP703FR

Armeringsväv:	Polyester	
Garntjocklek:	Varp	1430 Dtex
	Vävt	2 x 1100 Dtex
Konstruktion:	Halv panama	
Trådantal:	Varp	8 st/cm
	Vävt	8 st/cm
Totalvikt:	680 g/m ²	
Draghållfasthet:	Varp	2600 N/5 cm
EN-ISO 1421	Vävt	2700 N/5 cm
Draghållfasthet över svets:	2200 N/5 cm	
Rivhållfasthet:	Varp	450 N
DIN 53356	Vävt	550 N
Köldtålighet:	-30° C	
Värmebeständighet:	+70° C	
Flamskydd:	EN13501-1	
Miljöpåverkan:	Motstår rötsvampar, humussyra, dieselgaser, nitrösa gaser samt UV-ljus.	

Specification JP703FR

Reinforcing fabric:	Polyester	
Yarn density:	Warp	1430 Dtex
	Weft	2 x 1100 Dtex
Construction:	Half panama	
Number of thread:	Warp	8 per cm
	Weft	8 per cm
Total weight:	680 g/m ²	
Tensile strength:	Warp	2600 N/5 cm
EN-ISO 1421	Weft	2700 N/5 cm
Tensile strength over welding:	2200 N/5 cm	
Tear strength:	Warp	450 N
DIN 53356	Weft	550 N
Cold resistance:	-30° C	
Heat resistance:	+70° C	
Flame retardancy:	EN13501-1	
Environmental:	Withstands rotfungus, humic acid, dieselgas, nitrate gas and UV-light.	